


ASSEMBLY INSTRUCTIONS

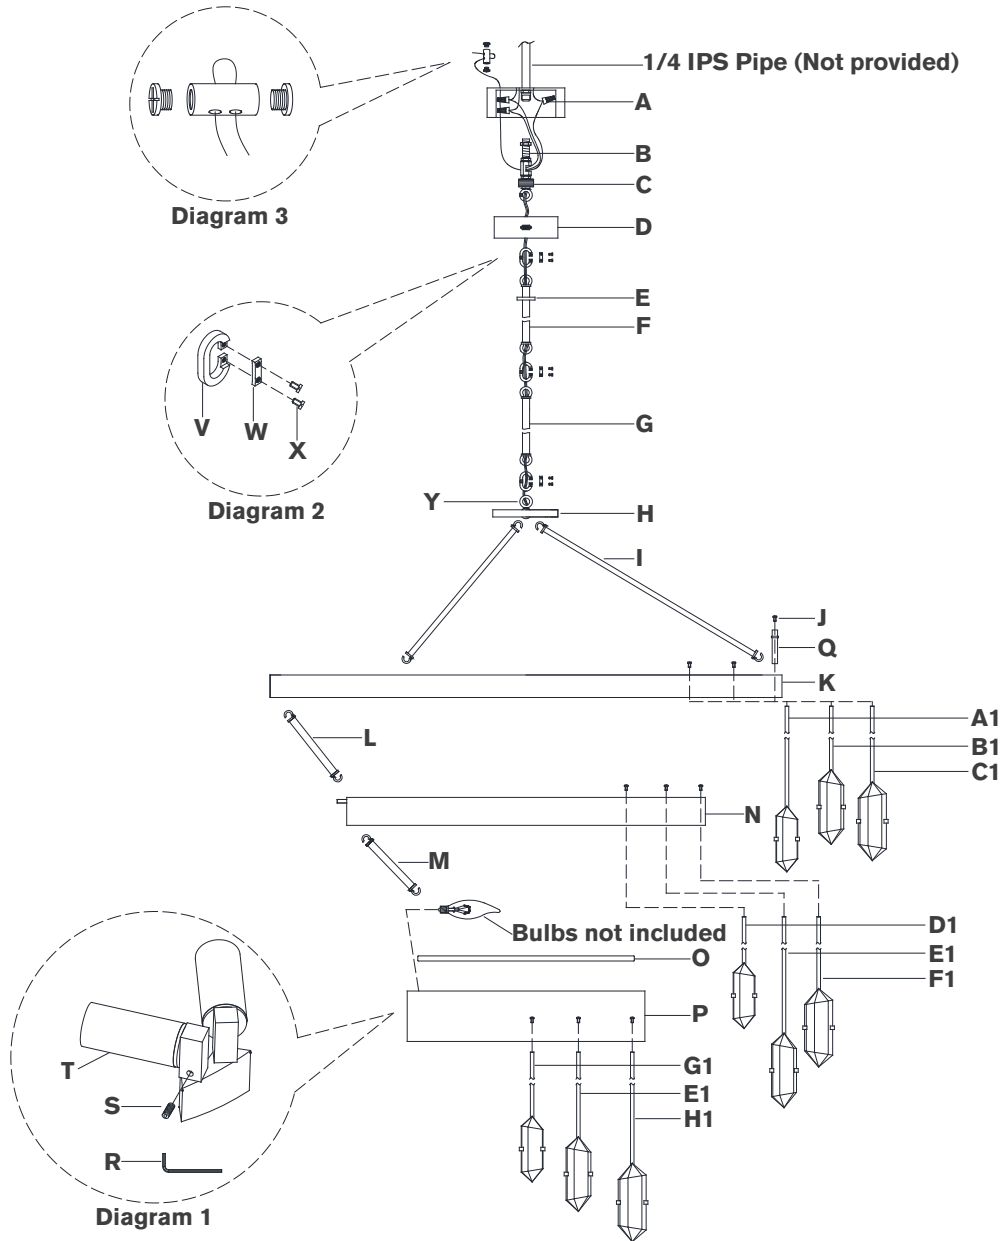

Halcyon Large Three Tier Chandelier

Item # KW 5102

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Chain Pliers
Slip Joint Pliers	Measuring Tape	Wire Cutters
Wire Strippers		

PERSONS REQUIRED: Two

- Carefully remove all parts from the box. Place on a clean, soft surface.
- It is recommended to install a 1/4 IPS threaded pipe, secured to a structural member of the building (not included). Then install hex nut and threaded nipple (B) into receiver and tighten with the wrench.
NOTE: Item must be supported independent of the junction box due to weight.
- Secure collar loop (C) to threaded receiver attached to structural member by tightening locknut.
- Install canopy (D) to collar loop (C) and secure with collar ring (E).
- Loosen screws (S) using provided wrench (R), then adjust sockets (T) to desired angle. (See diagram 1)
- Insert glass diffuser (O) into metal ring (P).
- Connect metal ring (P) and metal ring (N) using rods (M).
- Connect metal ring (N) and metal ring (K) using rods (L).
- Connect metal ring (K) and metal plate (H) using rods (I).
- Feed fixture wires and safety cable through rod (G) & (F).
- Remove metal part (W) from quick link (V) by removing screws (X). Then connect rod (G) & (F) together using quick link (V), secure metal part (W) to quick link (V) using screws (X). (See diagram 2)
NOTE: It is recommended to have a helper assist in supporting the fixture for step 12.

ASSEMBLY INSTRUCTIONS

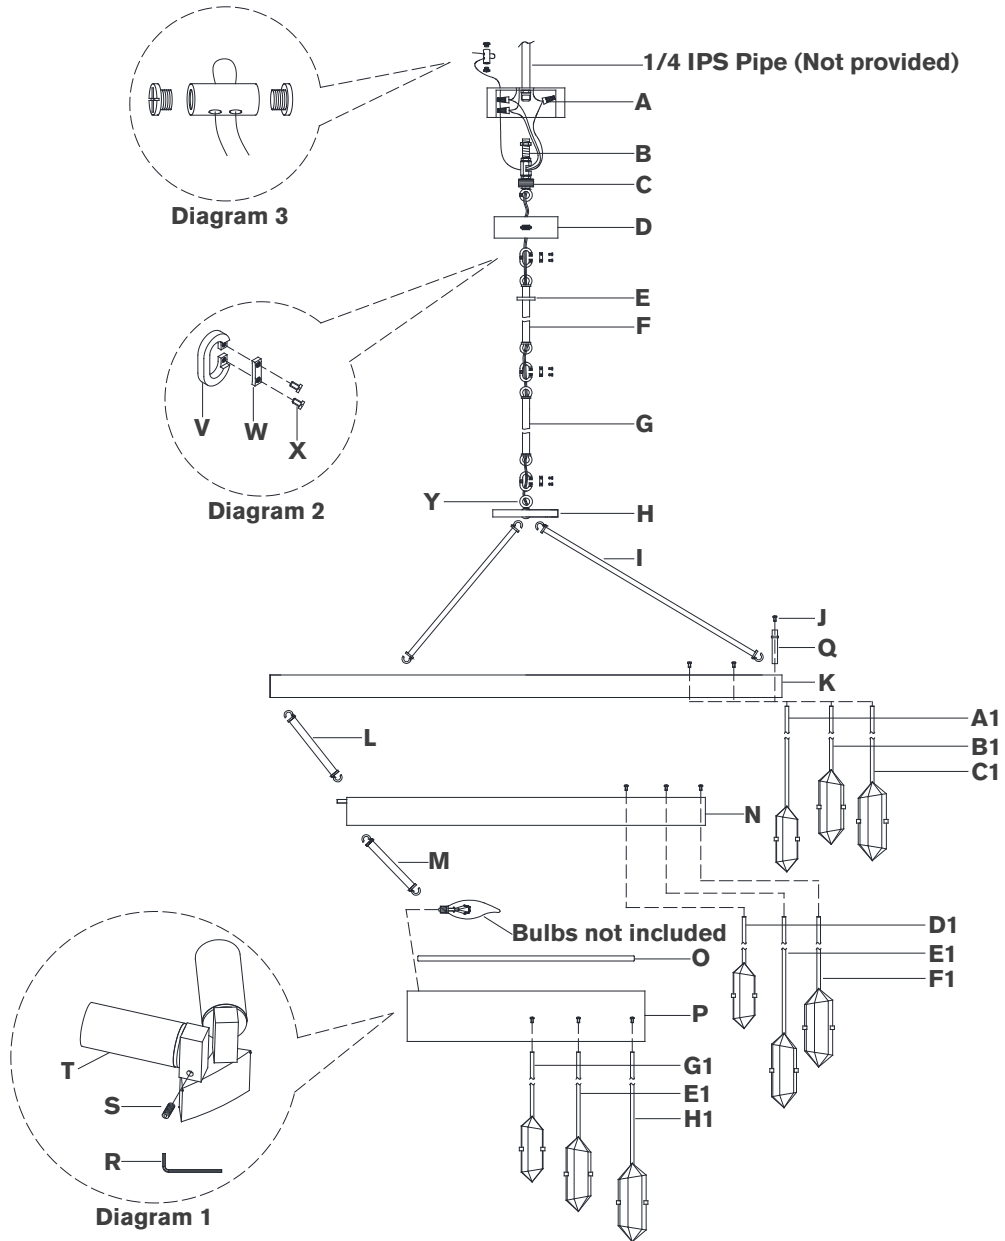

Halcyon Large Three Tier Chandelier


Item # KW 5102

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

12. Connect rods (G) & (F) to collar loop (C) and fixture loop (Y) using quick links (V). Secure metal part (W) to quick link (V) using screws (X). (See diagram 2)
13. Cut excess wires, being sure to leave enough to reach the junction box.
14. Separate two sides of molded wire, and strip insulation on each 5/8".
15. Loosen collar ring (E) and let canopy (D) slip down carefully.
16. Twist all fixture wires together, and slip through center hole of collar loop (C).
NOTE: Untwist wires and separate to prepare for connection.
17. Loosen cable lock and install to end of safety cable. Run safety cable through junction box and around structural member of building. Insert cable through cable lock and tighten the ends with a screwdriver to secure. (See diagram 3)
18. Connect fixture ground wire (bare copper) to the supply ground wire (usually green or bare copper) using wire nut (A).
NOTE: It is imperative that the fixture is grounded.
19. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut (A).
20. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut (A).
CAUTION: Do not reverse the hot and neutral connections.
21. Make sure all wire connections are tight, then carefully tuck into the junction box.
22. Install canopy (D) to collar loop (C) and secure with collar ring (E).
23. Install light bulbs into the sockets.
24. Install crystal drops start from the bottom tier as shown below diagram.

ASSEMBLY INSTRUCTIONS

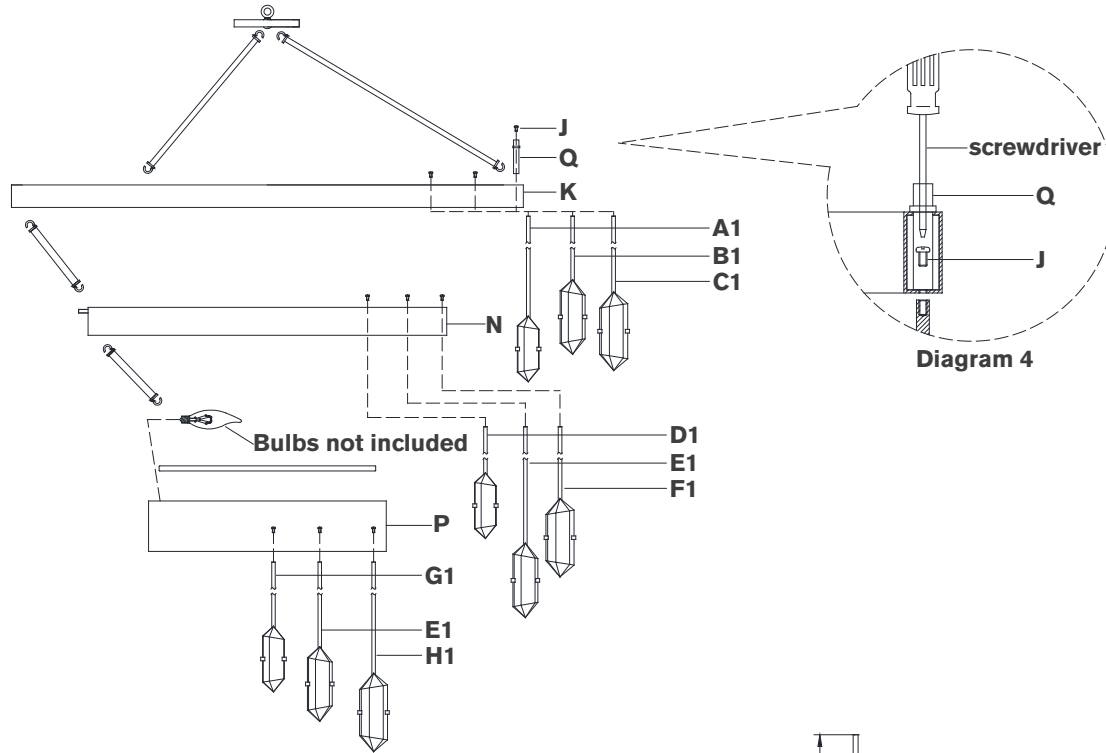

Halcyon Large Three Tier Chandelier

Item # KW 5102

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

Crystal drops Assembly:

1. Insert screw tool (**Q**) to the holes on the top of metal ring (**P**), then install crystal drops (**G1**) & (**E1**) & (**H1**) to the bottom of metal ring (**P**) and secure with screws (**J**).
2. Insert screw tool (**Q**) to the holes on the top of metal ring (**N**), then install crystal drops (**D1**) & (**E1**) & (**F1**) to the bottom of metal ring (**N**) and secure with screws (**J**).
3. Insert screw tool (**Q**) to the holes on the top of metal ring (**K**), then install crystal drops (**A1**) & (**B1**) & (**C1**) to the bottom of metal ring (**K**) and secure with screws (**J**).

Care Instructions: Clean only with a soft dry cloth or feather duster. Do Not use abrasive or chemical agents.

